

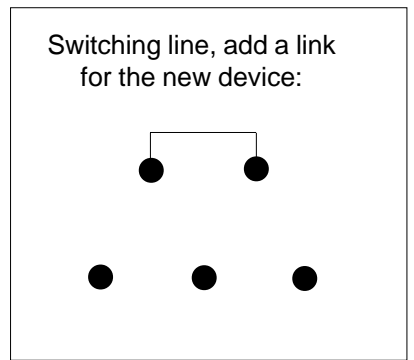
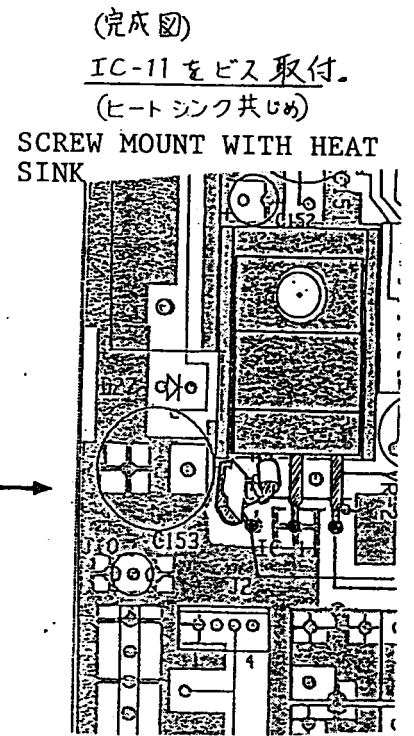


REPLACEMENT FOR L780S09 REGULATOR IN AR3000A MAIN UNIT

IF PCB IC11を變更

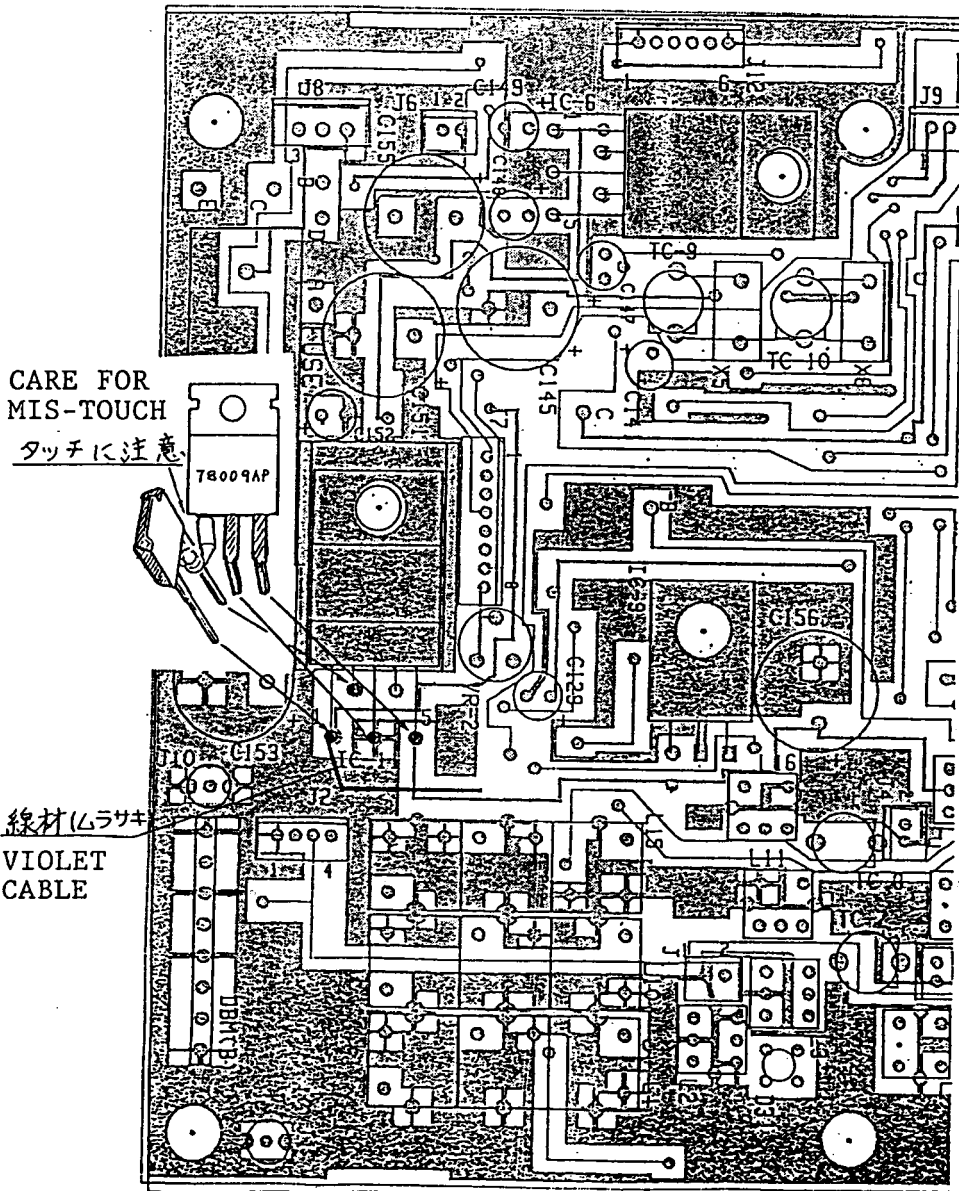

L780S09 (VOLTAGE REGULATOR WITH STROBE)



1. Vin
2. NC
3. Gnd
4. STB
5. Vout

The original voltage regulator with strobe is no-longer available (L780S09). As a substitute, another regulator 78009AP is employed with a FET J325 used to switch it (strobe).

The original regulator used 5 connection holes to the PCB, the new 'combination' arrangement uses a total of 4 holes, however you need to add a link for the switching line of the regulator - add a shorting link with between the PCB pads (would have been between pin-2 & pin-4 of the original device, see above).